

Parallel high-frequency electromagnetic field analysis based on hierarchical domain decomposition method

Amane Takei*

Faculty of Engineering, University of Miyazaki, Japan

Akihiro Kudo

National Institute of Technology, Tomakomai college, Japan

Makoto Sakamoto

Faculty of Engineering, University of Miyazaki, Japan

*Corresponding Author

E-mail:takei@cc.miyazaki-u.ac.jp

<http://www.miyazaki-u.ac.jp/>

Abstract

In this presentation, a parallel high-frequency electromagnetic field analysis code based on an iterative domain decomposition method is explained that is named ADVENTURE_FullWave. A stationary vector wave equation for the high-frequency electromagnetic field analyses is solved taking an electric field as an unknown function. Then, to solve subdomain problems by the direct method, the direct method based on the LDL^T decomposition method is introduced in subdomains. The simplified Berenger's PML is introduced which these eight corners are given the average value of all PML's layers. And, we show a numerical example of a microwave. More detail will be shown in the conference.

Keywords: Electromagnetic field analysis, Finite element method, Domain decomposition method, Huge-scale analysis.

1. Introduction

Electromagnetic field analysis based on a numerical analysis method, such as the finite element method, has become widespread [1] due to recent improvements in computer performance and numerical calculation technology. In the case of accurately reproducing an analysis model of complicated shape, it is necessary to use many small the elements. In the case of analyzing the state of electromagnetic waves propagation in a wide range, a wide analysis domain is examined. Furthermore, to perform a high-accuracy analysis, it is necessary to model the analysis domain with a sufficiently small element for the wave-length, and, in this case, the number of elements also increases. Increasing the number of elements increases the scale of the problem. Therefore, a method that can calculate large-scale problems has come to be demanded. Moreover, large-scale problems must be solved with high accuracy. In the presentation, a large-scale analysis code: ADVENTURE_FullWave is introduced, and detail of the parallel algorism is shown.

2. Governing equations and algorithm for parallel computing

In ADVENTURE_FullWave, the full-wave analysis based on an E method [1] is considered. \mathbf{E}_h and \mathbf{J}_h are finite element approximations of electric field \mathbf{E} [V/m] and current density \mathbf{J} [A/m²], respectively. The permeability is given by $\mu = \mu_0 \mu_r$ [H/m], μ_0 is the vacuum permeability [H/m], and μ_r is the relative permeability. The complex permittivity is given by $\varepsilon = \varepsilon_0 \varepsilon_r - \sigma / j\omega$ [F/m], ε_0 is the vacuum permittivity [F/m], ε_r is the relative permittivity, and ω is the angular frequency [rad/s]. The following equation is the finite element equation to be solved:

$$\begin{aligned} \iiint_{\Omega} (1/\mu) \text{rot} \mathbf{E}_h \cdot \text{rot} \mathbf{E}_h^* dv - \omega^2 \iiint_{\Omega} \varepsilon \mathbf{E}_h \cdot \mathbf{E}_h^* dv \\ = j\omega \iiint_{\Omega} \mathbf{J}_h \cdot \mathbf{E}_h^* dv. \end{aligned} \quad (1)$$

The equation contains complex numbers and becomes a complex symmetric matrix. In the present study, the

electric field \mathbf{E} , which is unknown, is obtained using the conjugate orthogonal conjugate gradient (COCG) method. The finite element approximation (1) is rewritten as $Ku = f$ by the coefficient matrix K , the unknown vector u , and the right-hand side vector f . Next, Ω is divided into N subdomains (Eq. (2)). Eq. (3) and (4) are obtained from Eq. (2).

$$\begin{bmatrix} K_{II}^{(1)} & 0 & 0 & K_{IB}^{(1)} R_B^{(1)T} \\ 0 & \ddots & 0 & \vdots \\ 0 & 0 & K_{II}^{(N)} & K_{IB}^{(N)} R_B^{(N)T} \\ R_B^{(1)} K_{IB}^{(1)T} & \dots & R_B^{(N)} K_{IB}^{(N)T} & \sum_{i=1}^N R_B^{(i)} K_{BB}^{(i)} R_B^{(i)T} \end{bmatrix} \begin{bmatrix} u_I^{(1)} \\ \vdots \\ u_I^{(N)} \\ u_B \end{bmatrix} = \begin{bmatrix} f_I^{(1)} \\ \vdots \\ f_I^{(N)} \\ f_B \end{bmatrix} \quad (2)$$

$$K_{II}^{(i)} u_I^{(i)} = f_I^{(i)} - K_{IB}^{(i)} u_B^{(i)} \quad (i = 1, \dots, N) \quad (3)$$

$$\left\{ \sum_{i=1}^N R_B^{(i)} \left\{ K_{BB}^{(i)} - K_{IB}^{(i)T} (K_{II}^{(i)})^{-1} K_{IB}^{(i)} \right\} R_B^{(i)T} \right\} u_B = \sum_{i=1}^N R_B^{(i)} \left\{ f_B^{(i)} - K_{IB}^{(i)T} (K_{II}^{(i)})^{-1} f_I^{(i)} \right\} \quad (4)$$

where $f_B^{(i)}$ is the right-hand vector for u_B , and $(K_{II}^{(i)})^{-1}$ is the inverse matrix of $K_{II}^{(i)}$. Equation (4) is referred to as an interface problem and is an equation for satisfying the continuity between domains in the domain decomposition method. For simplicity, rewrite equation (5) as follows:

$$\begin{aligned} Su_B &= g, \\ S &= \sum_{i=1}^N R_B^{(i)} S^{(i)} R_B^{(i)T}, \quad S^{(i)} \\ &= K_{BB}^{(i)} - K_{IB}^{(i)T} (K_{II}^{(i)})^{-1} K_{IB}^{(i)}. \end{aligned} \quad (5)$$

3. PML

3.1. Berenger's PML

The PML can be used to create an absorbing boundary by surrounding the analysis domain with a PML. From the viewpoint of the accuracy of the obtained solution, the PML is currently the most effective absorbing boundary condition. Although Berenger's PML is originally proposed as an absorbing boundary condition for the FDTD method, in the present study, we apply a finite element method dealing with an unstructured grid, we propose a simplified method omitting the directionality of electric conductivity given to the PML and confirm its effectiveness.

Berenger's PML [2] stacks several PMLs outside the analysis domain and gradually sets a large value of electric conductivity according to the outer layer so that the outermost wall can be surrounded with a perfect conductor wall without reflecting electromagnetic waves.

Figure 1 shows a schematic diagram of Berenger's PML absorbing boundary.

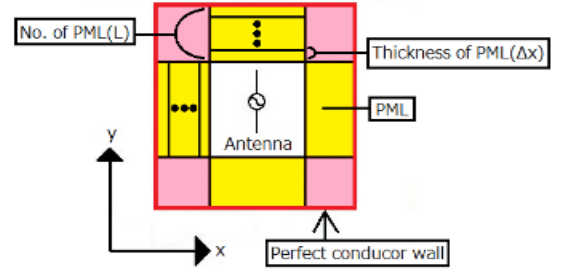


Fig. 1. PML absorbing boundary

In this paper the distribution of the electric conductivity for PML is expressed as follows:

$$\sigma = \sigma_{max} \left[\frac{(L - \hat{L}(x)) \Delta x}{L \Delta x} \right]^M \quad (6)$$

where Δx is the thickness of PML 1, L is the number of layers of the PML, $\hat{L}(x)$ is a coefficient determined by position x , and $\hat{L}(x) = 0$ at the position of the L th layer, $\hat{L}(x) = 1$ at the position of the $(L-1)$ th layer, and $\hat{L}(x) = L-1$ at the position of the first layer.

Moreover, σ_{max} is the maximum value of the electric conductivity for the PML, and M is the degree distribution of electric conductivity. This equation is used to determine the electric conductivity of each layer of the PML.

The parameters to be determined as the parameters of the PML are the thickness Δx of PML 1, the number L of PML layers, the maximum electric conductivity σ_{max} of the PML, the degree M distribution of the electric conductivity, the reflection coefficient R [dB] between the PML of the outermost layer, and the perfect conductor wall. The reflection coefficient R is approximated as follows:

$$|R(\phi)| \cong \exp \left[-\frac{2\sigma_{max} L \Delta x}{(M+1)\epsilon_0 c} \cos \phi \right] \quad (7)$$

where ϕ is the incident angle of the electromagnetic wave, and c is the speed of light. Since we cannot decide the incident angle for an arbitrary incident wave, $\phi = 0$, a reflection coefficient for perpendicular incidence is used as a reference. Moreover, since the M that gives the distribution of the electric conductivity causes the calculation accuracy to deteriorate if the change of the electric field in the PML is too steep, M is approximately 2 to 4. If the number of layers L is too large, more memory will be required, and if L is too small, it will not function adequately as an absorbing boundary. There are many cases where the concrete number of L is set to 4 to

16. The thickness Δx of PML 1 is a constant thickness of all layers.

We set the reflection coefficient $R(0)$ according to the required accuracy. Upon determining the above parameters, the maximum electric conductivity σ_{max} is given as follows:

$$\sigma_{max} = -\frac{(M+1)\epsilon_0 c}{2L\Delta x} \ln|R(0)| \quad (8)$$

In the present study, we construct a PML using (6) through (8) with $L = 9$, $M = 4$, and $\Delta x = \lambda/10$. However, in order to reduce the analysis scale, we examine the optimum value of L in the next section.

3.2. Numerical results

We assign the PML to the dipole antenna model. The analysis domain is a cube of length 0.6 [m] so that the distance from the antenna to the innermost PML matches the wavelength. The current density is applied to the antenna as a current source as follows:

$$I(y) = I_0 \cos\left(\frac{2\pi}{\lambda} y\right) \quad : -l \leq y \leq l \quad (9)$$

where $I_0 = 0.08$ [A/m²], λ is the wavelength, and l is the length from the feeding point to the antenna tip. The analysis frequency is 1 [GHz], and the length of the antenna is 0.15 [m], which is the half wavelength. Here, mesh division is performed so that the maximum side length of the element is 1/20 of the wavelength. The analysis domain's boundary is a perfect conductor. Figure 4 shows a schematic diagram of the dipole antenna model.

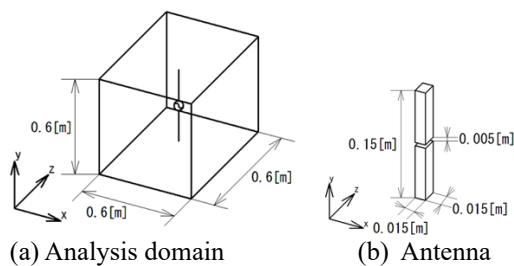


Fig. 2. Dipole antenna model

We assign PMLs to the domain boundary as shown in Fig. 2(a). The plane portion of the PML at the domain boundary overlaps a number of flat plates according to the number of layers, and the corner portion of the PML is one rectangular parallelepiped or cube. The boundary of the outermost layer of the PML is a perfect conductor wall. We perform performance evaluation by setting the thickness of one layer to be 0.03 [m] and the PML to have $L = 9$ (hereinafter a PML with L layers is abbreviated as PML(L)). Table 1 lists the number of elements and the degree of freedom of the analysis model.

Table 1. Number of elements and DOFs of the dipole antenna model

	PML(0): Perfect conductor wall	PML(9)
No. of Elements	4,669,759	26,899,669
DOFs	5,506,368	31,703,550

In (8), we set $L = 9$, $\Delta x = 0.03$, $M = 4$, and $R(0) = -120$ [dB], which yields the maximum electric conductivity σ_{max} to PML(9). In addition, we decide the electric conductivity of each layer using (6). In this study, we set the average value of each layer to the electric conductivity of the corner portion. We evaluate the performance of the PML based on the reflection coefficient obtained using the S_{11} parameter³. The observation point of the S_{11} parameter is on the x-axis 1 cm inside of the PML. The computing environment in the present study is a 25-PC cluster with Intel Core i7-2600K multi-core CPUs (total: 100 cores) and 32 GB memory. Table 2 lists the reflection coefficient, the CPU time, and the memory size.

Table 2. Results for reflection coefficient, CPU time, and memory size

	PML(0): Perfect conductor wall	PML(9)
Reflection coefficient [dB]	0	-18.65
CPU time [s]	1,278	18,787
Memory size [MB/core]	44.3	227.3

Acknowledgements

The present study was supported in part by a JSPS Grant-in-Aid for Scientific Research (Basic Research (A), 24H00695). The computer environment used in the present study was supported in part through a JST Adaptable and Seamless Technology transfer Program (A-STEP, JPMJTR24RF).

References

1. Takei, S. Sugimoto, M. Ogino, S. Yoshimura, H. Kanayama: Full Wave Analyses of Electromagnetic Fields with an Iterative Domain Decomposition Method, *IEEE Transactions on Magnetics*, 46:8 (2010), 2860-2863.
2. Takei, I. Higashi, M. Aikawa and T. Yamada, "Microwave analysis based on parallel finite element method," *Journal of Advanced Simulation in Science and Engineering*, 6:1 (2019), 215-233.

Authors Introduction

Prof. Amane Takei



He is working as Professor for Department of Electrical and systems Engineering, University of Miyazaki, Japan. His research interest includes high performance computing for computational electromagnetism, iterative methods for the solution of sparse linear systems, domain decomposition methods for large-scale problems. Prof. Takei is a member of IEEE, an expert advisor of The Institute of Electronics, Information and Communication Engineers (IEICE), a member of Institute of Electrical Engineers of Japan (IEEJ) and Japan Society for Simulation Technology (JSST).

Prof. Akihiro Kudo



He received ph.D. degree from Nagaoka University of Technology. He is a professor in the Department of engineering for innovation, National Institute of Technology, Tomakomai college. He is a member of Acoustical society of Japan, Information and Communication Engineers (IEICE).

Prof. Makoto Sakamoto



He is presently a professor in the Faculty of Engineering, University of Miyazaki. His first interests lay in hydrodynamics and time series analysis, especially the directional wave spectrum. He is a theoretical computer scientist, and his current main research interests are automata theory, languages and computation. He is also interested in digital geometry, digital image processing, computer vision, computer graphics, virtual reality, augmented reality, entertainment computing, complex systems, artificial intelligence, data science, and so forth.