

A Study on Obstacle Avoidance of Mobile Robot Based on Ultrasonic Sensors

Xuan-Thu Le¹, Se-Bong Oh¹, Woo-Song Lee¹, Hang-Bong Shin¹, Jun-Hong Kim¹, Sung-Hyun Han²

¹Department of Mechanical Engineering, Graduate School, Kyungnam University, Masan, Korea
(Tel: 82-55-249-2590; Fax: 82-55-249-2590)
(Email: xuanthu_vinakor@yahoo.com)

²Division of Mechanical System and Automation Engineering, Kyungnam University, Masan, Korea
(Tel: 82-55-249-2590; Fax: 82-55-249-2617)
(Email: shhan@kyungnam.ac.kr)

Abstract: We present a new technique to autonomous navigation based on ultrasonic sensors for mobile robots traveling through the narrow aisle that leave only a few centimeters on each side between the *guides* and the robot. In our current implementation the ultrasonic sensor system fires at a rate of 100 ms, that is, each of the 8 sensors fires once during each 100 ms interval. This is a very fast firing rate, implemented here for optimal performance. This paper presents an extensively tested and verified solution to the problem. Our solution is based on the optimal placement of ultrasonic sensors at strategic locations around the robot. Both the sensor location and the associated navigation algorithm are defined in such a way that only the accurate radial sonar data is used for servoing..

Keywords: Ultrasonic sensors, Mobile robot, Obstacle avoidance.

I. INTRODUCTION

This paper presents a new technique to design the Intelligent Mobile Robot and describes an experimental obstacle avoidance system for mobile robots traveling through the narrow aisle of a warehouse where leave only a few centimeters on each side between the guides and the robot. In our application the aisles are 55 cm wide and the robot has a width of 30 cm, but the method described here is generally applicable to a large class of narrow-aisle navigation applications.

Our robot, called HLOOROBO, serves as a tested for the development of obstacle avoidance methods. HLOOROBO will be employed to traverse long aisles between stacks of 36-gallon steel drums, which are stored on forklift pallets as shown in Fig. 1.

When traveling in narrow aisles that leave only a few centimeters on each side between the guides and the robot (about 12 cm in our application), a measuring accuracy on the order of 1-2 cm is necessary for smooth servoing along the center of the corridor. The reasons are that the ultrasonic sensors are not suitable for narrow aisle navigation because of their poor angular accuracy.

For example, the widely used Polaroid ultrasonic sensors have a 15° radial accuracy of about 0.5 cm for short distances, but, with a 30° emission cone, the angular accuracy is extremely poor.

In general purpose obstacle avoidance methods there is no need for accurate measurements, because most systems are designed to respond to clusters of readings that indicate the existence of an object in a certain area of the world model. This is also evident in

the great popularity of potential field-based obstacle avoidance systems. Conventional "general-purpose" obstacle avoidance systems usually surround the robot with a ring of ultrasonic sensors installed at 15° intervals. For omnidirectional robots of circular shape, this design requires $360^\circ/15^\circ = 24$ sensors mounted on a ring around the robot. Similar designs using 24 sensors in 15° intervals are described in the literature.




Fig. 1. The drums are stacked up on wooden forklift pallets. The HLOOROBO moves through of 55 cm wide aisles among long rows of 36 gallon steel drums.

This paper presents an extensively tested and verified solution to the problem. Our solution is based on the optimal placement of ultrasonic sensors at strategic locations around the robot. Both the sensor location and the associated navigation algorithm are defined in such a way that only the accurate radial sonar data is used for servoing.

II. THE DESIGN OF SENSOR SYSTEM

The sensors are located on HLOOROBO as shown in Fig. 2.

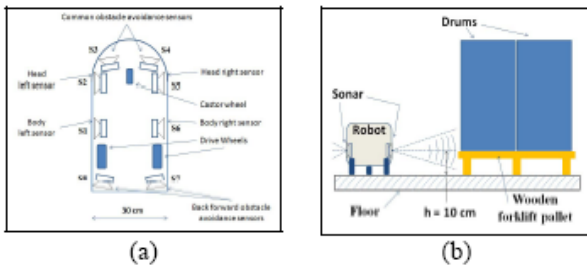


Fig. 2. Location of the ultrasonic sensors, sensors are mounted at the same height as the upper horizontal edge of the pallets.

The purpose of sensors S1 and S6 is to show if there is an aisle or corridor opening at either side of the robot. Sensors S3 and S4 are used for simple obstacle detection. Sensors S7 and S8 are also used for simple obstacle detection on back forward moving.

However, the most important sensors in this robot are the sensors S2 and S5, because they offer several important benefits, especially for the purpose of servoing along the center line of the narrow aisles, it is of great benefit to be able to measure (and therefore know) the locus of the aisle's center line before the HLOOROBO's body gets there.

The ultrasonic sensors are located on HLOOROBO fire at a rate of 100 ms, that is, each of the 6 sensors fires once during each 100 ms interval. This is a very fast firing rate, implemented here for optimal performance. We believe that slower firing rates would also work, because all sensor-triggered critical decisions are made after the vehicle slowed down in anticipation of a critical decision.

Our ultrasonic sensor system is based on the widely used ultrasonic transducers from Polaroid, together with the standard Polaroid circuit boards. Since the minimum range of these sensors (20 cm) is not suitable for our application, we have added to each board a custom circuit that allows a minimum range of 8-10 cm (the exact range varies as a function of temperature and other external factors).

All sensors are mounted at a height $h = 10$ cm, which assures that their center, is at the same height as the upper horizontal edge of the forklift pallets (see Fig. 2(b)). Since the sensors measure the distance to the closest object, they will "see" the pallet most of the time. However, if a drum protrudes by a few inches (as is expected in our application), then the sonars will "see" the protruding part of the drum.

III. MOTION CONTROL

In this paper we discuss four basic motion components were the focus of our research work, because in our application only these components needed to be automated. These basic components allow the robot to travel continuously and perform routine

inspections. The other remaining components represent transient conditions that are out of this research and may be needed only rarely.

These characteristics are:

1. Travel along the centerline of a narrow aisle.
2. Turn out of an aisle and into a corridor (90°).
3. Driving in a main corridor, looking for the next aisle
4. Turn into an aisle after traveling in a main corridor.

Some frequently used terms should be defined:

"Guide" — Any physical obstruction alongside the desired direction of travel. In the HLOOROBO application, Guides usually consist of 36 gallon drums standing on wood pallets. The drums are expected to be flush with the horizontal edge of the pallet, or they may protrude or be recessed by up to 10 cm. Since the snares are mounted at the same height as the horizontal edge of the pallets, they will "see" the horizontal edge of the pallet in-between drums, if a drum is missing (but the pallet is there), or if a drum is recessed.

"No-Guide" — A name for ultrasonic range readings that are larger than a certain threshold.

Readings larger than this threshold are interpreted as "there is no-guide;" readings smaller than (or equal to) this threshold are interpreted as "there is a guide." The no-guide (NG) value is computed such that they represent the largest range possible within the aisle. For the body sensors:

$$NG_C = L_{\max} - \frac{1}{2}W_{TRC} - D_C = 65 - \frac{30}{2} - 15 = 35\text{cm}$$

For the head sensors:

$$NG_H = L_{\max} - \frac{1}{2}W_{TRC} - D_H = 65 - \frac{30}{2} - 13 = 37\text{cm}$$

where:

$$L_{\max} = 65 \text{ cm} \sim \text{Maximal aisle width}$$

$$W_{TRC} = 30 \text{ cm} \sim \text{Width of HLOOROBO base}$$

$$D_C = 15 \text{ cm} \sim \text{Distance between Body sonar and longitudinal center of HLOOROBO base}$$

$$D_H = 13 \text{ cm} \sim \text{Distance between Head sonar and longitudinal center of HLOOROBO base}$$

Robot will stop if an obstacle in the robot's path is detected.

3.1 Travel along the center line of a narrow aisle.

The velocity variation:

a. Acceleration for $L_0 = 24$ cm (i.e., the first 24 cm in the beginning of motion)

b. The end of strategy is verified by three consecutive readings of both the head and the body sonars. All six readings must exceed the no-guide threshold before the robot begins the "Turn out of an aisle and into a corridor (90°)" motion component. This

prudent strategy is feasible because of the deceleration phase described in (c) as follows.




Fig. 3. The robot measures the width of the aisle every one centimeter and computes the locus of the center point N_i . N_i is temporarily stored and, 10 intervals (= 10 cm) later, used as the momentary target point for steering.

c. Deceleration is invoked when the head sensor "sees" *no-guide*. Deceleration for the longitudinal distance between the head and body sensors: $L_{FC} = 24$ cm. Therefore, the body sensor's reading that is tested for the exit condition can be verified by taking multiple readings.

Control Methods:

Range measurements from the head sensors are used to determine the absolute coordinates of the center of the aisle N . At a speed of 10 cm/sec and a firing rate of 100 ms, a new center point N_i can be computed at intervals of $100 \text{ msec} \times 10 \text{ cm/sec} = 1 \text{ cm}$ of travel. N_i is then stored in a ring buffer that holds 10 elements. This way, the newest element in the buffer is the present $N_{i=1}$ and the oldest element is N_{i-10} (i.e., $10 \times 1 \text{ cm} = 10 \text{ cm}$ behind N_i). The control algorithm distinguishes among different states:

- 1) During steady-state, the motor controller controls the speed of the motors such that HLOOROBO's center point G aims at N_{i-10} (i.e., at a point that is 10 cm behind N_i).
- 2) During the first 10 cm of travel, N_{i-10} has not been computed yet. During this transient distance the speed of the motors is controlled such that HLOOROBO's center point G aims at the oldest existing N (i.e., N_i). Steady-state is reached when $i > 11$, and Control Methods (a) goes into effect.

Robot will not continue moving if either first or second condition appears:

a) *Aisles are too narrow*

If an object is close to a side of the aisle but small enough to allow passage, then either it will be detected by sensors S3 and S4 as an obstacle, or it will be treated as a legitimate protrusion of the *guide*. In the latter case, HLOOROBO measures and computes the exact width of the remaining opening and compares it with a threshold for the minimum allowable aisle width, which is 48 cm in our application. If the measured width is above the threshold, HLOOROBO will continue and plot its path along the center between the protrusion and the other *guide*. If the measured width is below the threshold, HLOOROBO stops and notifies the operator.

b) *An obstacle is detected in the robot's path*

If either of the two obstacle detection sensors (S3 and S4 in Fig. 2) detects an obstacle ahead of the robot, HLOOROBO stops.

3.2 Turn out of an aisle and into a corridor (90°).

Control Methods:

The controller computes and maintains motor velocities so that the robot turns around a center of rotation 'C' about 90° (see Fig. 5). In our application 'C' is located on the outer perimeter of the robot.

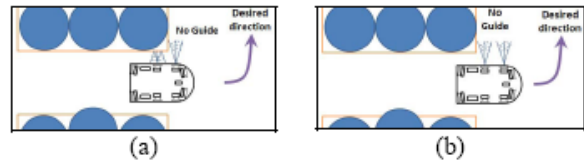


Fig. 4. Robot begins to decelerate and to turn when the head side sensor "sees" *no-guide* (a), and when both of the head & body sensors "see" *no-guide* (b).

This strategy will complete if:

- a. According to direction of rotation, either head right sensor or head left sensor measure a range of

$$R_F \leq \frac{1}{2} W_{TRC} - D_F + C_W = 65 - \frac{30}{2} - 12 = 38 \text{ cm}$$

where

C_W : Arbitrarily chosen reference steady-state distance between the HLOOROBO side and the corridor side of the *no-guide*.

- b. The rotation of 95° is completed. This exit condition is to serve as a safeguard if the primary exit condition (above) fails.




Fig. 5. HLOOROBO rotates around point C until the end of strategy is met.

3.3 Driving in the main corridor, looking for the next aisle

Control Methods:

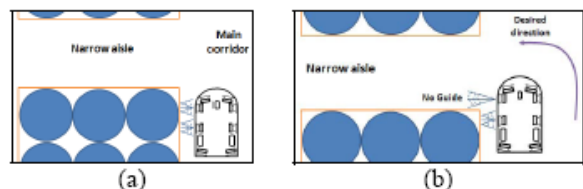


Fig. 6. HLOOROBO traveling along the short side of a drum/pallet *no-guide*: When body sensor "sees" *no-guide* the robot is stop and then turn into the next aisle.

This motion component has two distinct control strategies are described in more detail below.

a. The short side of the rectangular pallet/drum *no-guide* has the width of two rows of drums that is $2 \times 60 \text{ cm} = 120 \text{ cm}$.

b. When both the head and body sonar's reaches beyond the edge of the next aisle, the robot stops and prepares to turn in an aisle.

3.4 Turn into an aisle after traveling in a main corridor.




Fig. 7. The geometry progressive just prior to turn into an aisle after traveling in a main corridor.

Control Methods

During the "travel in a corridor looking for a new aisle" motion the robot tried to maintain a certain distance $C_w = 12 \text{ cm}$ from the narrow side of the *no-guide*.

We assume that there are no delays in the sonar measurements and that the sonar emission cone is exactly $\alpha = 30^\circ$ wide, as shown in Fig. 7, under these ideal conditions the body sensor located at point 'C' will see *no-guide* at the moment when the axis of the robot has advanced a distance x beyond the corner of the *guide* P. In the subsequent rotation around 'C' no part of the robot will protrude outside a circle of radius R , as shown in Fig. 7. Note that R is only a function of the geometric properties of the robot; for HLOOROBO we measured $R = 46 \text{ cm}$. From the geometry of Fig. 7 we can now derive that the condition $W > x + y$ will guarantee collision-free turning into the aisle. It is easy to see from Fig. 7 that $x = C_w \tan(\alpha/2)$ and $y = \sqrt{R^2 - C_w^2}$ so that the condition for collision free turning becomes

$$W > \sqrt{R^2 - C_w^2} + C_w \tan\left(\frac{\alpha}{2}\right)$$

Substituting the numeric values of our application into the above equation, we assume:

$$W > \sqrt{46^2 - 12^2} + 12 \tan\left(\frac{30^\circ}{2}\right) = 48 \text{ cm} \quad (1)$$

The result of Eq. (1) shows that *theoretically* the robot could safely enter any aisle of width $W > 48 \text{ cm}$.

IV. EXPERIMENTAL RESULTS

Our experimental vehicle - HLOOROBO, shown in Fig. 8, is equipped with 8 Polaroid ultrasonic sensors, which we customized for short range measurements (8-10 cm). This approach emphasizes the importance of the optimal location of the sonar to achieve extremely reliable and robust performance. Most successfully implemented conventional general purpose obstacle

avoidance algorithms rely on a statistical interpretation of the often inaccurate sonar range data. Because of the statistical uncertainty inherent in these systems they cannot avoid occasional collisions, especially when navigating in narrow aisles or doorways. By contrast, the algorithm presented in this paper has been shown to cope reliably and repeatably with narrow aisles and narrow-aisle entry, even under changing conditions.



Fig. 8. The picture of the HLOOROBO.

V. CONCLUSIONS

We have proposed a new technique based on ultrasonic sensors for narrow aisle passing. We have presented an extensively tested and verified solution to the problems. Our solution is based on the optimal placement of ultrasonic sensors at strategic locations around the robot. Both the sensor location and the associated navigation algorithm are defined in such a way that only the accurate radial sonar data is used for servoing.

REFERENCES

- [1] Buchenberger, M., Jörg, W., and Von Puttkamer, E., 1993, "Laserradar and Sonar-based World Modelling ...," *1993 IEEE Conference on Robotics and Automation*, Atlanta Georgia, May 10-15, pp. 534-541.
- [2] Flynn, A. M., 1998, "Combining Sonar and Infrared Sensors for Mobile Robot Navigation," *The International Journal of Robotics Research*, Vol. 7, No. 6, December pp.5-14.
- [3] Crowley, J. L., 1989, "World Modeling and Position Estimation for a Mobile Robot Using Ultrasonic Ranging," *Proceedings of the 1989 IEEE International Conference of Robotics and Automation*, Scottsdale, Arizona, May 14-19, pp. 674-680.
- [4] Everett, H. R., Gilbreath, G. A., Tran, T. and Nieuwsma, J. M., 1990, "Modeling the Environment of a Mobile Security Robot," *Technical Document 1835*, Advanced Systems Division, Naval Ocean Systems Center, San Diego, California 92152-5000, June.
- [5] Johann Borenstein, David Wehe, Liquiang Feng and Yoram Koren, "Mobile Robot Navigation in Narrow Aisles with Ultrasonic Sensors," *ANS 6th Topical Meeting on Robotics and Remote Systems*, California, 1995.